

CE0598


TECHNICAL DATA SHEET

PRODUCT : TRIPOD

REF NO. : PN 800(DP)(10 ft)

REVISION	03
DATE	27.10.20

Conforms to EN 795:2012 Type B

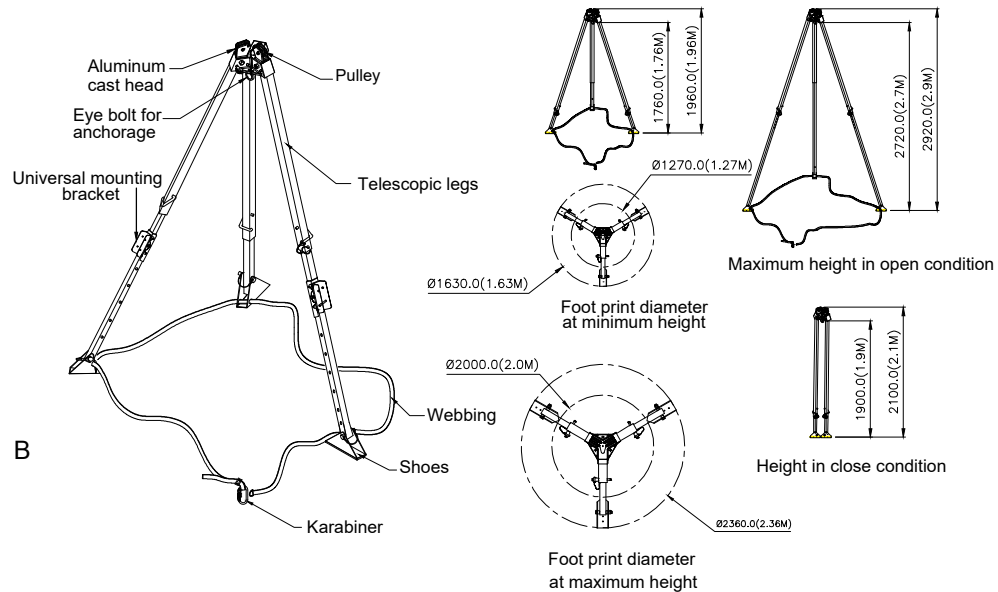

01	DESIGN	<ul style="list-style-type: none"> Adjustable height from 1.76m. to 2.72m. from ground level. At minimum height, distance between legs (foot point) : Ø1.2 m. At maximum height, distance between legs (foot point) : Ø2.0 m. Adjustment achieved by sliding telescopic legs (Inner & Outer). Locking pins attached by cables. Securely connected two eyebolts to be used for connection to personal protective equipment. Two pulley system provided to pass the wire rope of winch mounted on one leg and retrieval block on the other leg simultaneously. Supplied with two universal mounting brackets to mount winch on one and Retrieval on other brackets.
02	LOAD CAPACITY	<ul style="list-style-type: none"> 500 kg.
03	TRIPOD LEGS	<ul style="list-style-type: none"> Material : Prime quality aluminum alloy. Finish : Anodized.
04	CAST HEAD	<ul style="list-style-type: none"> Material : Prime quality aluminum alloy. Finish : ED Coated Black.
05	EYE BOLT & LOCKING PINS	<ul style="list-style-type: none"> Material : Prime quality aluminum alloy Eye Bolt & Stainless steel locking pin. Finish : Deburred & Polished
06	SHOE	<ul style="list-style-type: none"> Material : Alloy Steel. Finish : ED Coated Black.
07	VITAL TEST COMPLIANCE	<ul style="list-style-type: none"> Static Strength : Tested at 12 kN for 3 Minutes. Dynamic Strength & Integrity test : When tested dynamically with a rigid mass of 100 Kg, the test mass shall arrested and anchor hold an increased mass of 300 Kg for 3 minutes.
08	WEIGHT	<ul style="list-style-type: none"> 21.8 Kgs ± 0.100 Kgs.