


DOC. NO.	REVISION	ISSUE	DATE
QF/RD/05	01	00	28-06-2023



REVOLTA EXPANDABLE INTERNAL SHOCK ABSORBING LANYARD
Ref. No. PN 371(IS)(A)(OR)

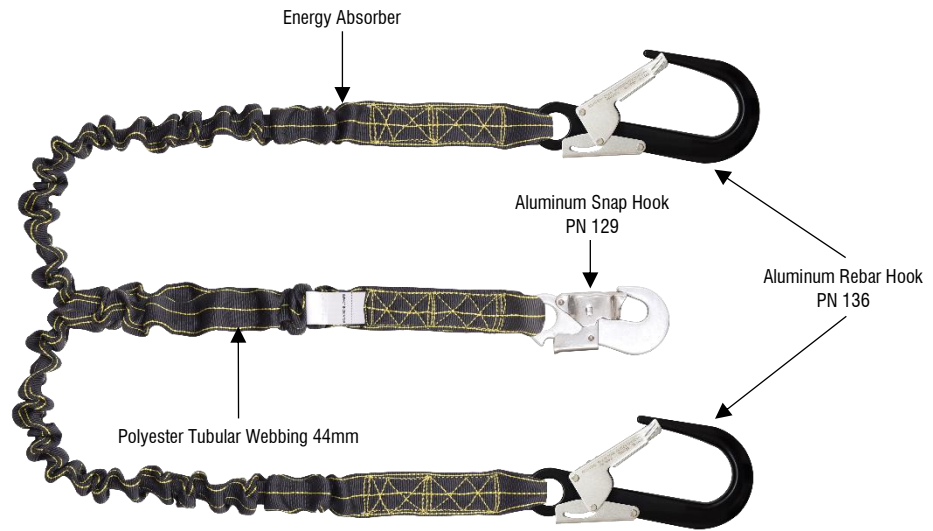

CERTIFIED TO EN 355:2002, VG11 RfU CNB/P/11.063 AND EN 354:2010

CE 0598

DESIGN

- Double, Y shaped lanyard
- Made with specially treated oil, water & dust repellent polyester webbing
- 44 mm wide highly UV rays' resistant polyester webbing
- Equipped with two Aluminum Rebar Hook PN 136 and other side Aluminum Snap Hook PN 129

WEIGHT

2.0 mts. : 2040 gm ± 10 gm

LANYARD WEBBING

Material : Polyester
 Width : 44 ± 1 mm
 Minimum Breaking Strength : 25 kN

STITCHING THREAD

Material : High Tenacity Polyester

METAL COMPONENTS

Material : High Strength Aluminum Alloy
 Finish : Natural silver/ Colored, Anodized
 Minimum Breaking Strength : 23 kN

VITAL TEST COMPLIANCE

Static Strength : Sustains a force of 15 kN for 3 minutes
 Dynamic Performance : Maximum breaking force does not exceed 6 kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kg

TECHNICAL DATA SHEET