


DOC. NO.	REVISION	ISSUE	DATE
QF/RD/05	01	00	12-08-2024



WALL MOUNTED DAVIT

Ref. No. DA 03

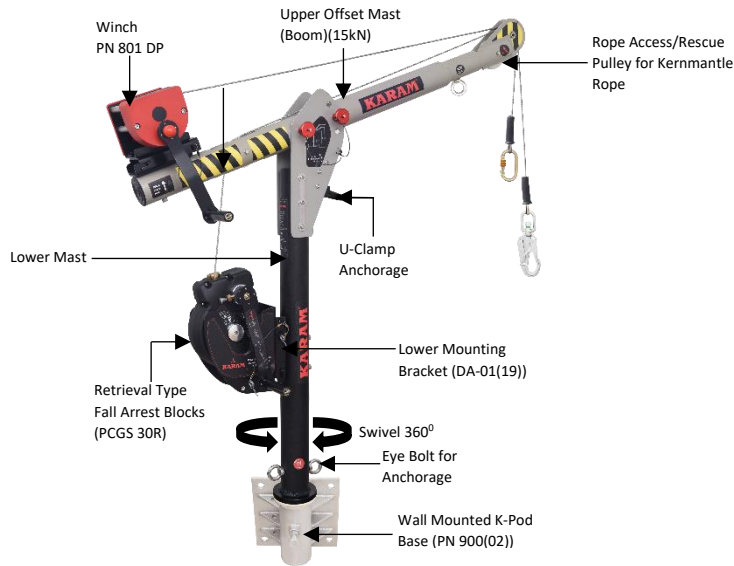

CONFORMS TO EN 795:2012 TYPE B AND AS/NZS 5532:2013

DESIGN

Wall Mounted Davit (DA 03) provides a safe and secure system for easy access to Confined space. It is an ideal choice to provide overhead anchorages in large holes of confined space. Comes with 2 Pre-installed lower mounting bracket assembly [DA-01 (19)] for easy installation of Winch and Retrieval on Davit. Comes with multi anchorage point for rescue purpose. Comes with a specially designed bracket PN 900(02) to install it on wall. Wall Mounted Davit (DA 03) can also be installed on concrete, metal structure or vehicle with help of suitable fasteners to access various confined spaces. Comes with separate rope access/Rescue pulley and anchor point for the use of 10.5mm to 13.0mm kernmantle rope. Anchor points rated load-
 A – 15kN
 B – 21kN
 C – 21kN
 Compatible with KARAM winch PN 801 (DP), PN 817 (DP), PN 818 (DP) and PN 818SR (DP).
 Compatible with Retrieval blocks:-
 PCGS-20RN
 PCGS-30R
 Retrieval Block can be mounted on column with bracket lower assembly by using universal mounting bracket SA-17(26).
 Upper offset mast of the DA 03 is adjustable at 3 defined points:-

POSITION	HEIGHT	REACH
Lower	920mm	1280mm
Middle	845mm	1620mm
Upper	675mm	1900mm

Please refer to an engineer to verify if the structure is suitable for the installation.

PHYSICAL PARAMETERS

DA 03 : Body made up of high strength Aluminium Alloy.

MAXIMUM LOAD CAPACITY

DA 03 : 500 kgs.

FINISH

DA 13 : Powder Coated in dual Colour - Black and Grey.

SYSTEM STRENGTH

15 kN for 3 min.

WEIGHT

Lower Mast : 17.67 kgs ± 0.20 kgs.
 Upper offset mast (Boom) : 12.47 kgs ± 0.20 kgs.
 Wall mounting base : 9.97 kgs ± 0.10kgs.
 Complete assembly weight : 54.41 kgs ± 0.10 kgs.