


DOC. NO.	REVISION	ISSUE	DATE
QF/RD/05	00	01	21-11-2020



DIELECTRIC BEAM ANCHOR TROLLEY

Ref. No. SA 15B

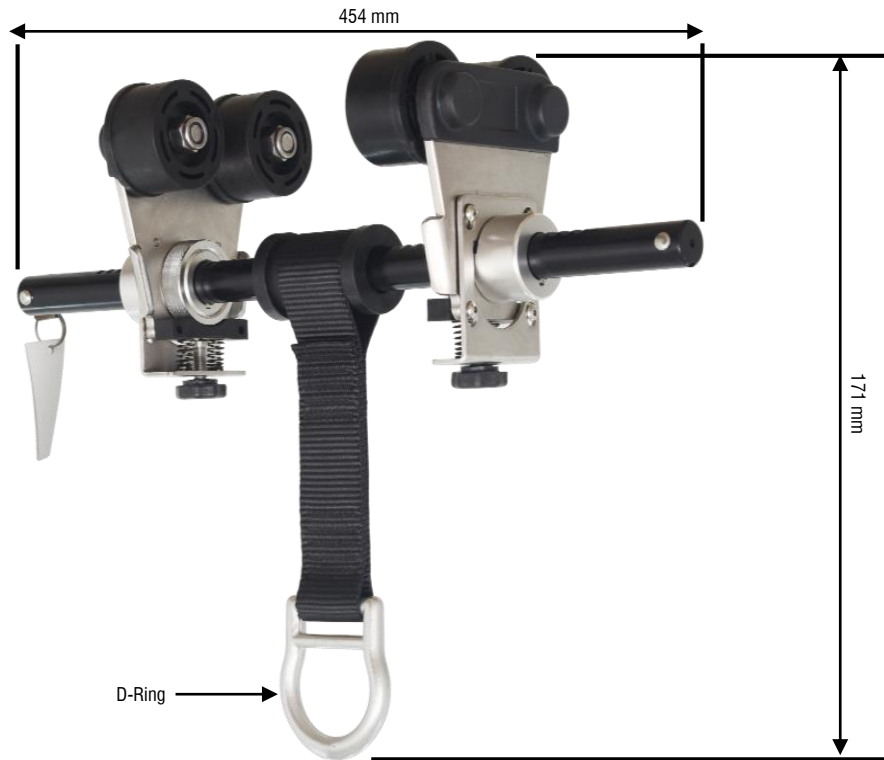

TESTED AS PER EN 795:2012 & ANSI Z 359.1-2007

DESIGN

- Anchor capable of being installed on flange of beams.
- Adjustment of the jaw to variable positions enables it to be installed to varying flange widths.
- Glides smoothly along the beam and provide horizontal mobility.
- Electrically insulated rollers for safe working in condition where there is possible electrical hazard.

FLANGE WIDTH COMPATIBILITY

Compatible with Min. Flange Width	:	80.0 mm
Compatible with Max. Flange Width	:	250.0 mm

METAL COMPONENT

Material	:	Roller	:	Polymer
	:	Locking Beam	:	Aluminum Alloy
	:	Flange	:	Stainless Steel
Minimum Breaking Strength	:	23 kN (5000 lbs)		
Minimum Dielectric Resistance	:	30 KV		

WEIGHT

3.7 kg \pm 0.1 kg